

Converter® 200H



SPECIFICATIONS

total installed power:	75 kW
nominal motor power*:	60 kW
nominal current:	180 A
starting current:	180 A
machine footprint:	1850 mm 1200 mm 1400 mm height
dry weight:	1500 Kg
treatment chamber volume:	135 lt
noise:	80 dB
production rate:	25 to 40 Kg/h



AVERAGE CONSUMPTION

electricity:	around 0,4-0,6 kW/Kg based on waste moisture content
water:	1200 lt/h *



CONNECTIONS:

cooling water inlet: 1'	cooling water outlet: 1'
tap water inlet: 1/2'	condensate discharge: 1'



Optionals:

- *WRS: Water Recirculation System
(to reduce water consumption
1200 lt/h to 50 lt/day)



*400 V, 50 Hz, 1500 rpm

Converter® 200H




Room requirements:

Room ventilation: 10 air changes per hour
Working environment temperature: 6°C ÷ 45°C



Machine positioning and minimum maintenance spaces:

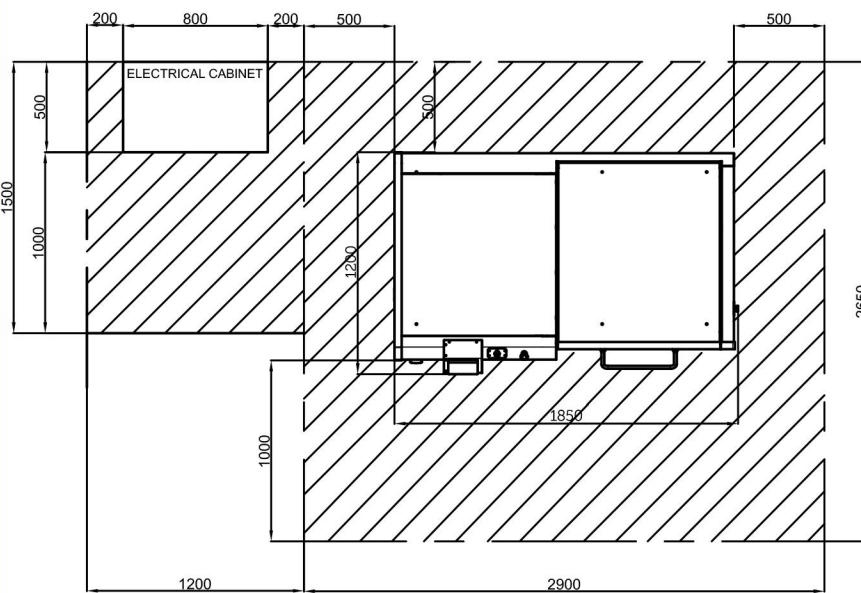

200H: Height 2000
Equipment clear Area
(different solutions available upon request)



ELECTRICAL CABINETS DIMENSIONS

width: 800 mm
depth: 500 mm
height: 1600 mm
weight: 150 Kg

(OMPeco supplies 3 linear meters of interconnection cables between cabinets and machine)



OMPeco s.r.l.
Via Cavalieri del Lavoro 16
10024 Moncalieri
Torino, Italy
www.ompeco.com
info@ompeco.com

Legal headquarters and billing address:
Corso Laghi 11
10051 Avigliana - Torino, Italy
Reg. Imp. RI/PRA/2014/46068/800
R.E.A. di Torino 1188899
VAT n° IT11118350013

Information, photos and description contained in this publication are supplied for informative purpose and are not binding.

© 2015 OMPeco