

Converter® MO200

SPECIFICATIONS

total installed power:	75 kW
nominal motor power:	60 kW
nominal current:	140 A
machine footprint:	1900 mm 1250 mm 1300 mm height
dry weight:	1420 Kg
treatment chamber volume:	200 lt
noise:	80 dB
production rate:	infected waste: 25 to 40 kg/h organic waste: 40 to 60 kg/h municipal waste : 60 to 80 kg/h



AVERAGE CONSUMPTION

electricity:	around 0,4-0,6 kW/Kg based on waste moisture content
water:	1200 lt/h *




CONNECTIONS:

cooling water inlet: 1 '	cooling water outlet: 1 '
tap water inlet: 1/2 '	condensate discharge: 1 '



Optionals:

- *WRS: Water Recirculation System (to reduce water consumption 1200 lt/h to 50 lt/day)



Converter® MO200




Room requirements:

Room ventilation: 10 air changes per hour
Working environment temperature: 6°C ÷ 45°C



Machine positioning and minimum maintenance spaces:

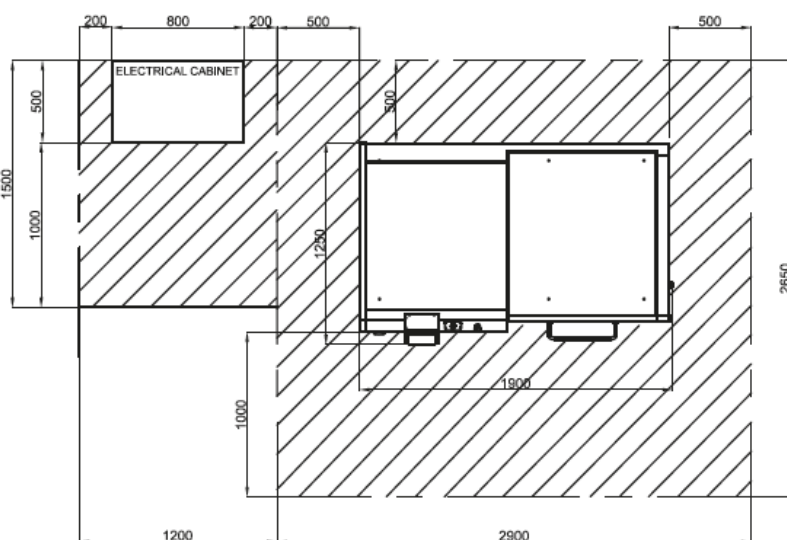

MO100: Height 2000
Equipment clear Area
(different solutions available upon request)



ELECTRICAL CABINETS DIMENSIONS

width: 800 mm

depth: 500 mm

height: 1600 mm

weight: 150 Kg

(OMPeco supplies 3 linear meters of interconnection cables between cabinets and machine)

OMPECO

OMPECO s.r.l.
Via Cavalieri del Lavoro 16
10024 Moncalieri
Torino, Italy
www.ompeco.com
info@ompeco.com

Legal headquarters and billing address:
Corso Laghi 11
10051 Avigliana - Torino, Italy
Reg. Imp. RI/PRA/2014/46068/800
R.E.A. di Torino 1188899
VAT n° IT11118350013

Information, photos and description contained in this publication are supplied for informative purpose and are not binding.

© 2015 OMPeco