

Converter® 100 liters

H100/MO100/NV60

SPECIFICATIONS

total installed power:	55 kW
nominal motor power*:	50 kW
nominal current:	70 A
starting current:	80 A
machine footprint:	1500 mm 1100 mm 1400 mm height
dry weight:	1000 kg
treatment chamber volume:	100 lt
noise:	80 dB
production rate:	hospital waste 15 to 20 kg/h urban waste 20 to 40 kg/h

AVERAGE CONSUMPTION

electricity:	around 0,4-0,6 kW/kg based on waste moisture content
--------------	--

CONNECTIONS

cooling water inlet: 1'	cooling water outlet: 1'
tap water inlet: 1/2'	condensate discharge: 1'

Optionals

WRS
Water Recirculation System



*400 V, 50 Hz, 1500 rpm


Converter® 100 liters

H100/MO100/NV60

Room requirements:

Room ventilation: 10 air changes per hour
Working environment temperature: 6°C÷45°C

Machine positioning and minimum maintenance spaces:

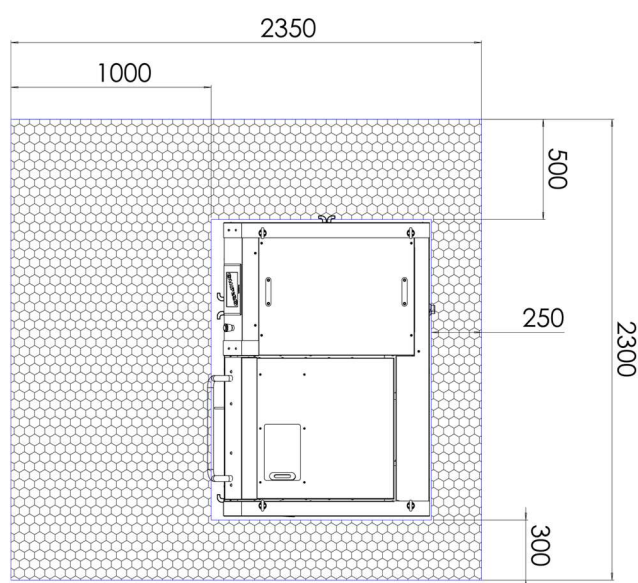

Equipment Clear Area
(different solutions available upon request)

ELECTRICAL CABINETS DIMENSIONS

width: 1000 mm
depth: 660 mm
height: 2000 mm
weight: 450 kg

(OMPeco supplies 3 linear meters of interconnection cables between cabinets and machine)

OMPESCO OMPECO s.r.l.
Via Cavalieri del Lavoro 16
10024 Moncalieri
Torino, Italy
www.ompeco.com
info@ompeco.com

Legal headquarters and billing address:
Corso Laghi 26
10051 Avigliana - Torino, Italy
Reg. Imp. RI/PRA/2014/46068/800
R.E.A. di Torino 1188899
VAT n° IT11118350013

Information, photos and description contained in this publication are supplied for informative purpose and are not binding.

© 2020 OMPeco