

Converter® 100H

SPECIFICATIONS

total installed power:	60 kW
nominal motor power*:	50 kW
nominal current:	90 A
starting current:	150 A
machine footprint:	1500 mm 1050 mm 1400 mm height
dry weight:	850 Kg
treatment chamber volume:	135 lt
noise:	80 dB
production rate:	10 to 15 Kg/h



AVERAGE CONSUMPTION

electricity:	around 0,4- 0,6 kW/Kg based on waste moisture content
water:	600 lt/h *




CONNECTIONS:

cooling water inlet: 1'	cooling water outlet: 1'
tap water inlet: 1/2'	condensate discharge: 1'



Optionals:

- *WRS: Water Recirculation System (to reduce water consumption 600 lt/h to 30 lt/day)



*400 V, 50 Hz, 1500 rpm

Converter® 100H




Room requirements:

Room ventilation: 10 air changes per hour
Working environment temperature: 6°C ÷ 45°C



Machine positioning and minimum maintenance spaces:

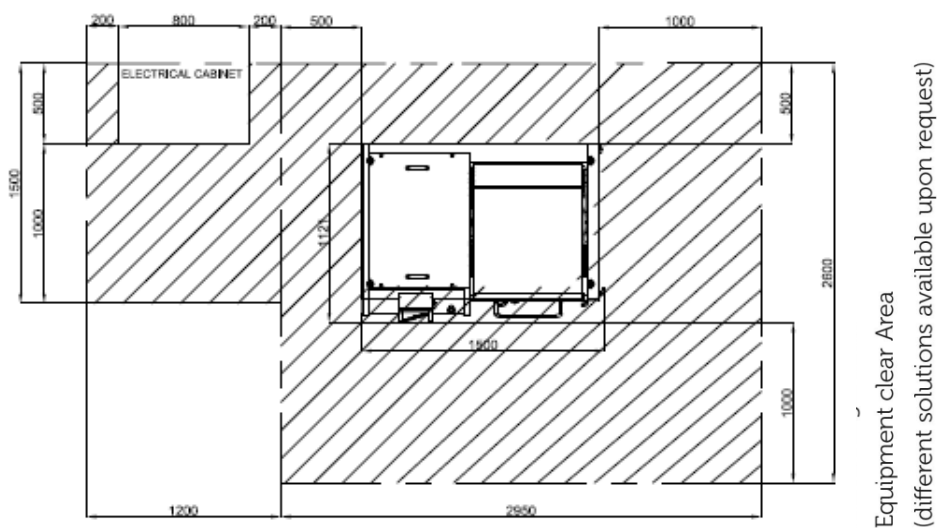

ELECTRICAL CABINETS DIMENSIONS

width: 800 mm
depth: 500 mm
height: 1600 mm
weight: 150 Kg

(OMPeco supplies 3 linear meters of interconnection cables between cabinets and machine)

OMPeco

OMPeco s.r.l.
Via Cavaliere del Lavoro 16
10024 Moncalieri
Torino, Italy
www.ompeco.com
info@ompeco.com

Legal headquarters and billing address:
Corso Laghi 11
10051 Avigliana - Torino, Italy
Reg. Imp. RI/PRA/2014/46068/800
R.E.A. di Torino 1188899
VAT n° IT11118350013

Information, photos and description contained in this publication are supplied for informative purpose and are not binding.

© 2015 OMPeco